ZI SHXDIVSMFF C

ZING Shower Range
Zing2 Adjustable Thermostatic Rigid Riser Diverter Bar Shower Chrome



Features:

- Enjoy peace of mind with a 38°C safety stop, including override when required
- Install or replace with ease thanks to a fast-fit fixing kit that makes fitting your shower bar valve quick and simple
- Supplied with everything you need, including bar shower valve, hose, telescopic rigid riser rail and rub-clean anti-limescale drench head and single function handset
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:


WRAS Certificate No: 250203002
WRAS Expiry Date: 28/02/2030

TMV2 Certificate No: 2310701
TMV2 Expiry Date: 02/10/2028

Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Zinc, Stainless Steel & ABS
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	Single Function Handset
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.3**
Maximum Dynamic Pressure (bar):	5**
****TMV2 Rated only between 1 bar minimum and 5 Bar Maximum Dynamic Pressure**	
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2”
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

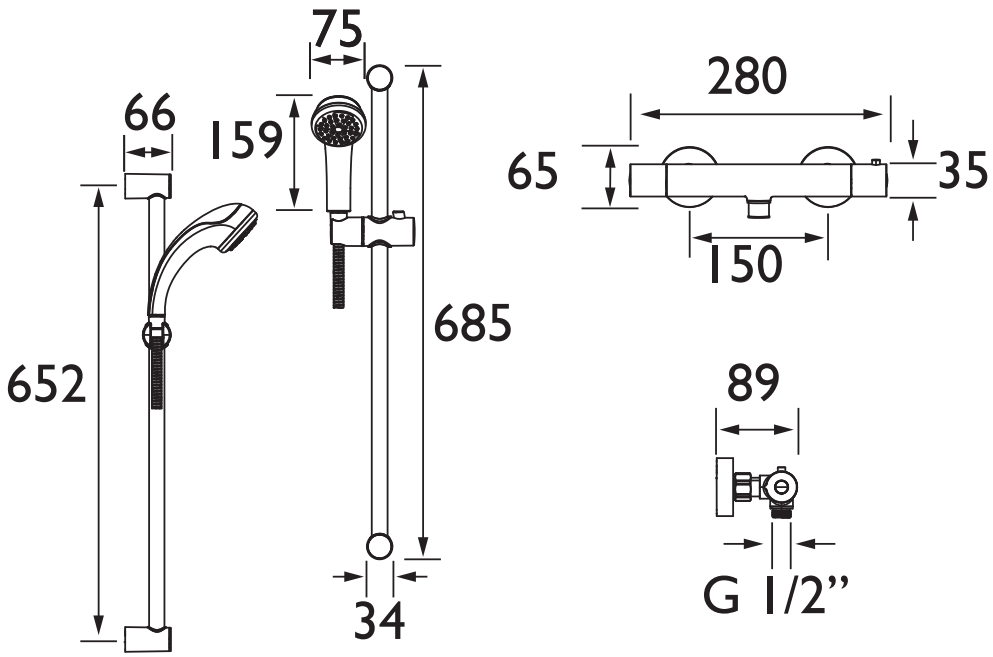

Flow Rates (l/min)

System Pressure (bar)	0.3	0.5	1	2	3	5
Through Handset (with flow limiters)	2.5	4	6.7	10.3	12.8	16.7
Through Handset (without flow limiters)	3.5	4.8	7.3	10.8	13.1	17.2

TECHNICAL DATA SHEET

BRISTAN

D17

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* **- Lifetime guarantee applies to products purchased on or after 01/04/2026.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.